

瑞安市俊鼎达机械有限公司
RUIAN JUNDINGDA MACHINERY CO., LTD,

地址 / **ADD:** 浙江省温州市瑞安市东山街道鸿创园2栋
Building 2, Hongchuangyuan, Dongshan Street,
Rui'an City, Wenzhou, Zhejiang Province

电话 / **TEL:** 0577-6580 9762 / 6580 9763

手机 / **M.T:** 135 8757 6448

邮箱 / **E-MAIL:** 2008xdjx@163.com

本公司保留对设备外观有关技术参数修改的权利，恕不另行通知
The company reserves the right to modify the technical parameters
of the appearance of the equipment without prior notice.



raijddjx.1688.com
www.jundingda.com

JUNDINGDA MACHINERY

致力于热熔胶机的开发
生产以及销售的专业供应商



ISO9001 CE
www.jundingda.com



ABOUT US

公司简介

瑞安市俊鼎达机械有限公司注册于2011年，是一家集研制，开发，生产热熔胶机，发泡热熔胶机，过滤器设备，喷涂复合设备的技术型企业。拥有自己独立的现代化厂房，公司现有员工30号人左右，年产值在3500万以上。

经过多年实践，俊鼎达公司热熔胶机产品广泛应用于如下（医用防护，家电，家纺，汽车，热熔胶涂布，包装，无纺布材料复合，卫生用品，滤清器，空气净化器等新风系统上面），产品远销东南亚，印度，俄罗斯，欧美市场。

为企业节约能源，提供更高喷涂胶应用。2021年正向研发国产第一套发泡热熔胶机和发泡上胶线，每年交付市场在20套发泡热熔胶机应用。发泡热熔胶机技术应用推广到空调，冰箱，过滤，新能源电池，软体家具，汽车等行业。

公司遵循以技术开拓市场，以质量发展市场的宗旨。不断创新和学习。推出XD-Z智能型系列热熔胶机，发泡热熔胶机，反抽刮枪，零滴漏胶枪，小纤维喷枪。向客户提供高水平，高品质的设备。为客户带来更大的产品价值体验。

感谢长期以来你们对俊鼎达产品的信任，支持和合作。

Rui'an Jundingda Machinery Co., Ltd. was registered in 2011. It is a technology-based enterprise that integrates research, development, and production of hot melt adhesive machines, foaming hot melt adhesive machines, filter equipment, and spray coating composite equipment. Having its own independent modern factory, the company currently has around 30 employees and an annual output value of over 35 million yuan.

After years of practice, Jundingda Company's hot melt adhesive machine products are widely used in the following areas: medical protection, home appliances, home textiles, automobiles, hot melt adhesive coating, packaging, non-woven fabric material composite, hygiene products, filters, air purifiers and other fresh air systems. The products are exported to Southeast Asia, India, Russia, Europe and America markets.

To save energy for enterprises and provide higher spray adhesive applications. In 2021, we are actively developing the first domestically produced foam hot melt adhesive machine and foam gluing line, and delivering 20 sets of foam hot melt adhesive machine applications to the market every year. The application and promotion of foam hot melt adhesive machine technology to industries such as air conditioning, refrigeration, filtration, new energy batteries, soft furniture, and automobiles.

The company adheres to the principle of exploring the market with technology and developing the market with quality. Continuously innovate and learn. Launch XD-Z intelligent series hot melt adhesive machine, foaming hot melt adhesive machine, reverse suction scraper gun, zero drop glue gun, and small fiber spray gun. Provide customers with high-level and high-quality equipment. Bring greater product value experience to customers.

Thank you for your long-term trust, support, and cooperation in Jundingda products.

俊鼎达公司通过线上线下各种途径，与中外客商建立商业往来。信息互通，合作共赢。

Jundingda Company uses various online and offline channels to, Establish commercial relations with domestic and foreign merchants. Information exchange, Win win cooperation.



HONORS

公司荣誉

所有的荣耀，所有的成就，都源于俊鼎达团队团结务实，稳步向前，着力创新与技术研发的努力，并提升了公司发展的潜力。

All glory and achievements stem from the unity, pragmatism, steady progress, innovation, and technological research and development efforts of the Jundingda team, which have enhanced the company's development potential.



XD-Z10L 热熔胶机

XD-Z10L Hot Melt Glue Machine

1. PLC信捷触屏控制系统，中英文操作，手动和自动供胶模式；
2. 容量10L, 熔胶速度每小时8kg, 工作电源AC-220V, 功率3.5kw;
3. 计量泵1*8.0cc, 传感器类型k或pt100(特殊要求定制)；
4. 供胶方式：高精度计量泵供胶，伺服或变频驱动可选，出胶口2路，回流1路；
5. 可连接2管2枪（胶枪可选：手动胶枪、刮枪、点胶枪、喷枪）；
6. 适用手动封箱、快递袋、信封袋、纸袋、滤清器、浴帽等行业喷、涂、点胶。

1. PLC Xinjie touch screen control system, operated in both Chinese and English, with manual and automatic glue supply modes;
2. Capacity of 10L, adhesive speed of 8kg per hour, working power supply of AC-220V, power of 3.5kw;
3. Metering pump 1 * 8.0cc, sensor type k or pt100 (customized for special requirements);
4. Glue supply method: high-precision metering pump for glue supply, servo or variable frequency drive optional, 2 glue outlets and 1 reflux channel;
5. Can connect 2 tubes and 2 guns (optional glue guns: manual glue gun, scraper gun, glue gun, spray gun);
6. Suitable for manual sealing, express bags, envelope bags, paper bags, filters, shower caps, and other industries for spraying, coating, and dispensing.



简约、集成、智能
Simplicity, Integration, Intelligence

胶枪选择 Selection of glue gun



XD-SDXJ 120mm




XD-SDLX 120mm




条状胶枪 XD-XQ 40mm



零滴漏胶枪 XD-LD 40mm

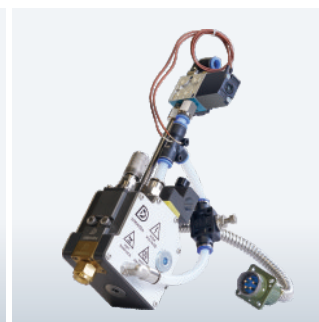

XD-LX 40mm

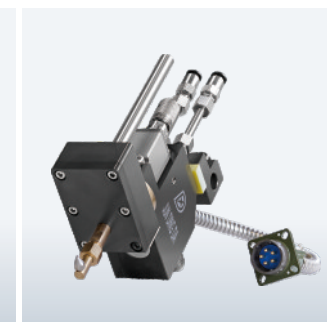

旋转胶枪 XD-XZ 40mm



XD-25XW 40mm




XD-FC 60mm



XD-FCKT 70mm

LCD & 平面图 LCD & Plan diagram:

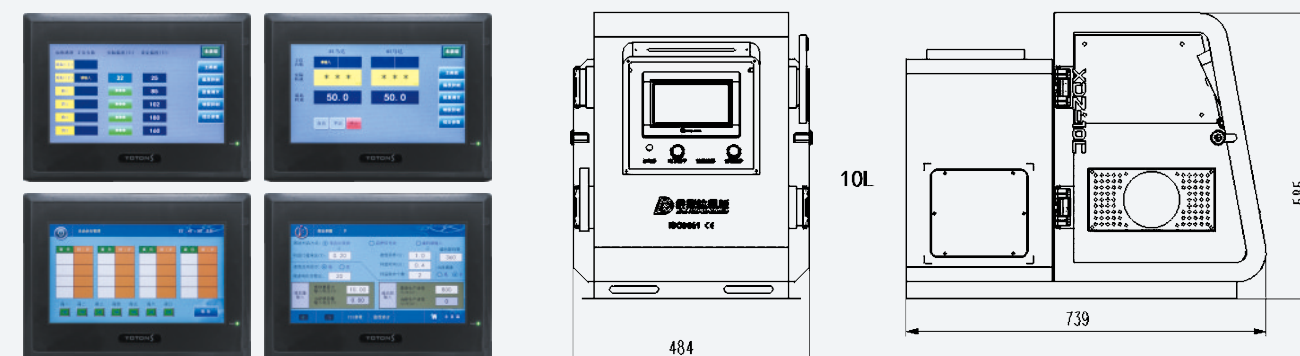

XD-Z15L 热熔胶机

XD-Z15L Hot Melt Glue Machine

1. 信捷或西门子操作系统（西门子操作系统可选），中英文操作，自动开关机功能，胶量手动或自动跟踪；
2. 容量15L，熔胶速度每小时12kg，工作电源 AC-220V，功率4.5kw；
3. 计量泵2*5.4cc*1套，传感器类型k或pt100（特殊要求定制）；
4. 供胶方式：高精度计量泵供胶，伺服或变频驱动可选，出胶口2-4路，回流2-4路；
5. 可连接2-4管2-4枪(胶枪可选：手动胶枪、刮枪、点胶枪、喷枪)；
6. 适用手动封箱、快递袋、信封袋、纸袋、滤清器、材料复合、卫生用品行业。

1. Xinjie or Siemens operating system (Siemens operating system optional), operated in both Chinese and English, with automatic on /off function, manual or automatic tracking of adhesive volume;
2. Capacity of 15L, melt adhesive speed of 12kg per hour, working power supply of AC-220V, power of 4.5kw;
3. Metering pump 2 * 5.4cc * 1 set, sensor type k or pt100 (customized for special requirements);
4. Glue supply method: high-precision metering pump for glue supply, servo or variable frequency drive optional, 2-4 glue outlets, 2-4 reflux channels;
5. Can connect 2-4 tubes and 2-4 guns (optional glue guns: manual glue gun, scraper gun, glue gun, spray gun);
6. Suitable for manual sealing, express bags, envelope bags, paper bags, filters, material composites, and hygiene products industries.



简约、集成、智能
Simplicity, Integration, Intelligence

胶枪选择 Selection of glue gun



XD-2FC 80mm



XD-25XW 100mm



XD-ZHFC 90mm




条状胶枪 XD-XQ 40mm




XD-SDXJ 120mm



XD-SDLX 120mm



LCD & 平面图 LCD & Plan diagram:

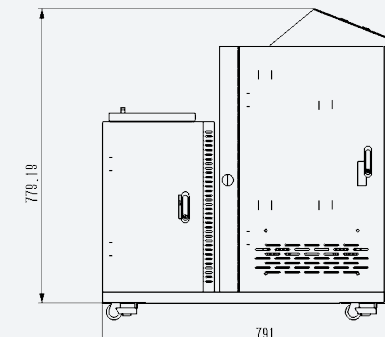

XD-Z20L 热熔胶机

XD-Z20L Hot Melt Glue Machine

1. 信捷或西门子操作系统，中英文操作，自动开关机功能，胶量手/自动跟踪；
2. 容量20L，熔胶速度每小时16kg，工作电源AC-220V，功率5.5kW，上下2层独立加热；
3. 计量泵2*5.4cc传感器类型k或pt100（其他型号计量泵和传感器均可）；
4. 供胶方式：高精度计量泵供胶，伺服和变频驱动可选，出胶口2-4路，回流2-4路；
5. 可连接2-4管2-4枪，（胶枪可选：手动胶枪、刮枪、点胶枪、螺旋喷枪、纤维喷枪）；
6. 适用手动封箱、快递袋、信封袋、纸袋、滤清器、材料复合、卫生用品行业、医疗行业等。

1. Xinjie or Siemens operating system, operated in both Chinese and English, with automatic power on/off function, adhesive measurement manual/automatic tracking;
2. Capacity of 20L, melt adhesive speed of 16kg per hour, working power supply of AC-220V, power of 5.5kW, independent heating of upper and lower layers;
3. Metering pump 2 * 5.4cc sensor type k or pt100 (other models of metering pumps and sensors are acceptable);
4. Glue supply method: high-precision metering pump for glue supply, servo and variable frequency drive optional, 2-4 glue outlets and 2-4 reflux channels;
5. Can connect 2-4 tubes and 2-4 guns (optional glue guns: manual glue gun, scraper gun, glue gun, spiral spray gun, fiber spray gun);
6. Suitable for manual sealing, express bags, envelope bags, paper bags, filters, material composites, hygiene products industry, medical industry, etc.



NEW
最新机型

简约、集成、智能
Simplicity, Integration, Intelligence

胶枪选择 Selection of glue gun




XD-25XW 100mm



XD-2FC 80mm



XD-ZHFC 90mm

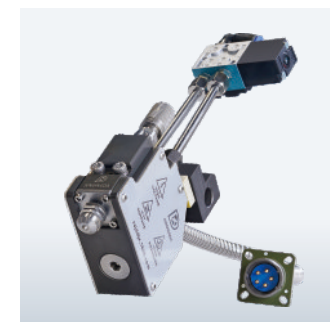

零滴漏胶枪 XD-LD 40mm




XD-SDXJ 120mm



XD-SDLX 120mm




XD-FCTB 300mm

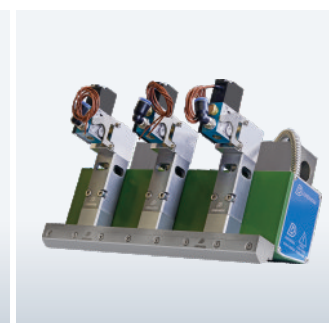

XD-3FC 300mm

平面图 Plan diagram:

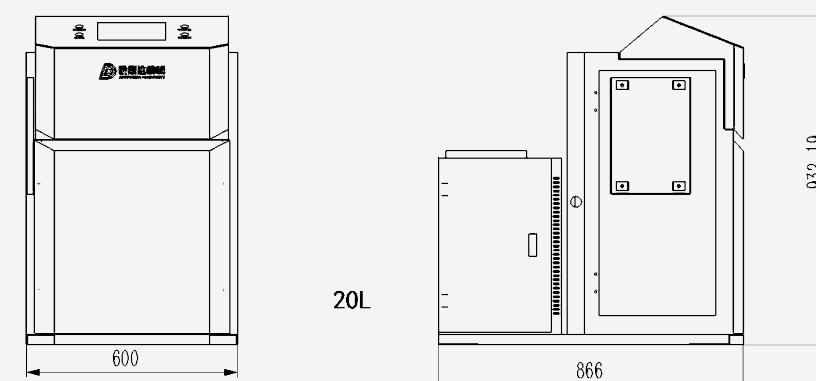

XD-Z30L 热熔胶机

XD-Z30L Hot Melt Glue Machine

1. 信捷或西门子PLC操作系统，中英文操作，自动开关机功能，胶量自动跟踪；
2. 容量30L，熔胶速度每小时26kg，工作电源AC-220V或AC380V，功率 7.5kW，上下2层独立加热；
3. 计量泵 2*5.4cc*2套，传感器类型k或pt100 (其他型号计量泵和传感器均可)；
4. 供胶方式：高精度计量泵供胶，伺服和变频驱动可选，出胶口 2-4 路，回流2-4 路；
5. 可连接2-4管2-4枪，(胶枪可选：手动胶枪、刮枪、点胶枪、螺旋喷枪、纤维喷枪)；
6. 适用手动封箱包装、纸袋、滤清器、材料复合、卫生用品行业、医疗行业等。

1. Xinjie or Siemens PLC operating system, operated in both Chinese and English, with automatic on/off function and automatic tracking of adhesive quantity;
2. Capacity of 30L, melt adhesive speed of 26kg per hour, working power supply of AC-220V or AC380V, power of 7.5kW, independent heating of upper and lower layers;
3. Two sets of 2 * 5.4cc metering pumps, sensor type k or pt100 (other models of metering pumps and sensors are acceptable);
4. Glue supply method: high-precision metering pump for glue supply, servo and variable frequency drive optional, 2-4 glue outlets and 2-4 reflux channels;
5. Can connect 2-4 tubes and 2-4 guns (optional glue guns: manual glue gun, scraper gun, glue gun, spiral spray gun, fiber spray gun);
6. Suitable for manual sealing packaging, paper bags, filters, material composites, hygiene products industry, medical industry, etc.




简约、集成、智能
Simplicity, Integration, Intelligence


胶枪选择 Selection of glue gun



XD-FCTB 300mm

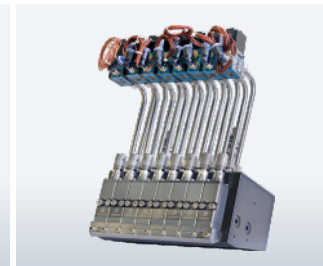


XD-TBDK 300mm

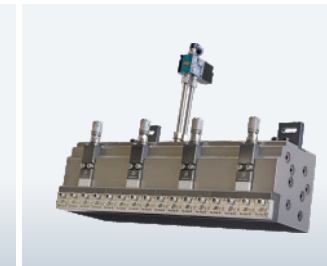


XD-25XW 400mm



XD-2FC 80mm

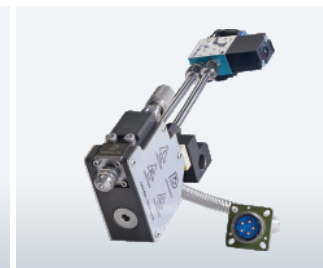

零滴漏胶枪 XD-LD 40mm

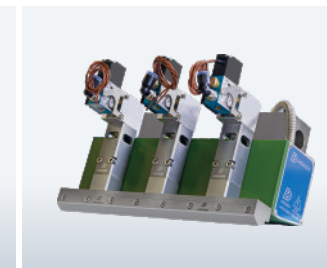

XD-3FC 300mm



XD-SDXJ 120mm





XD-SDLX 120mm



XD-ZHFC 90mm



LCD & 平面图 LCD & Plan diagram:

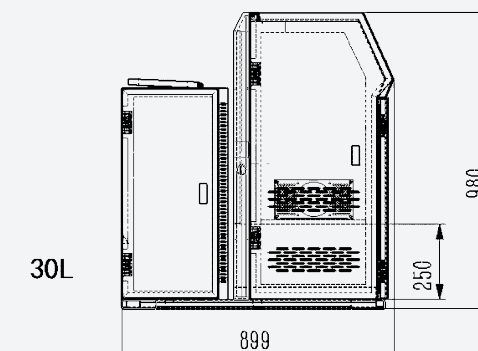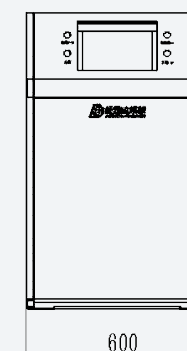

XD-Z50L 热熔胶机

XD-Z50L Hot Melt Glue Machine

1. 信捷或西门子PLC操作系统，中英文操作，自动开关机功能，胶量自动跟踪；
2. 容量50L，熔胶速度每小时45kg，电源AC380V，功率9.5kw，上下2层独立加热；
3. 计量泵 2*5.4cc*2 套 2*20cc，传感器类型k或pt100 (其他型号计量泵和传感器均可)；
4. 供胶方式：高精度计量泵供胶，伺服和变频驱动可选，出胶口2-4路，回流2-4路；
5. 可连接2-4管2-4枪，(胶枪可选：反抽刮枪、点胶枪、螺旋喷枪、纤维喷枪)；
6. 适用空气过滤器、无纺布、opp膜、汽车内外饰、卫生用品、医疗行业等产品喷涂胶复合。

1. Xinjie or Siemens PLC operating system, operated in both Chinese and English, with automatic on/off function and automatic tracking of adhesive quantity;
2. Capacity of 50L, melt adhesive speed of 45kg per hour, power supply of AC380V, power of 9.5kw, independent heating of upper and lower layers;
3. Metering pump 2 * 5.4cc * 2 sets 2 * 20cc, sensor type k or pt100 (other models of metering pumps and sensors are acceptable);
4. Glue supply method: high-precision metering pump for glue supply, servo and variable frequency drive optional, 2-4 glue outlets and 2-4 reflux channels;
5. Can connect 2-4 tubes and 2-4 guns (optional glue guns: reverse suction scraper gun, glue gun, spiral spray gun, fiber spray gun);
6. Suitable for spraying adhesive composite on products such as air filters, non-woven fabrics, OPP films, automotive interior and exterior decorations, hygiene products, and medical industries.



简约、集成、智能
Simplicity, Integration, Intelligence


胶枪选择 Selection of glue gun




XD-ZHFC 90mm




XD-FCTB 300mm

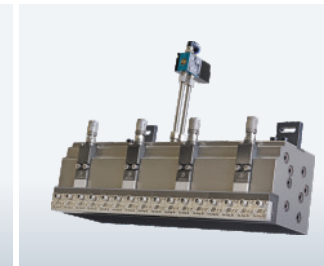

XD-25XW 400mm

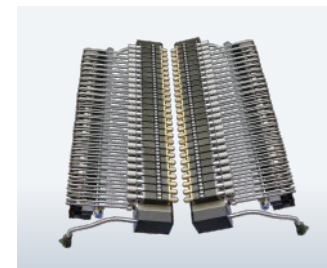


XD-26LD 25.4-700mm

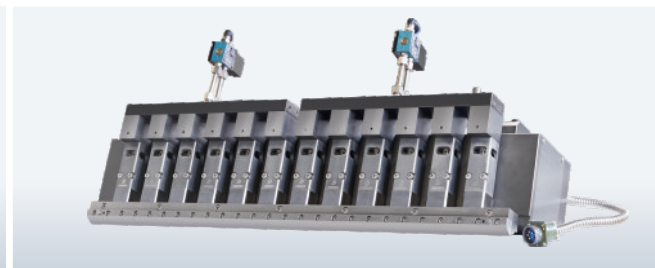


XD-ZHFCTB 1000mm



XD-48ZH25.4 (适配1300mm上胶线)

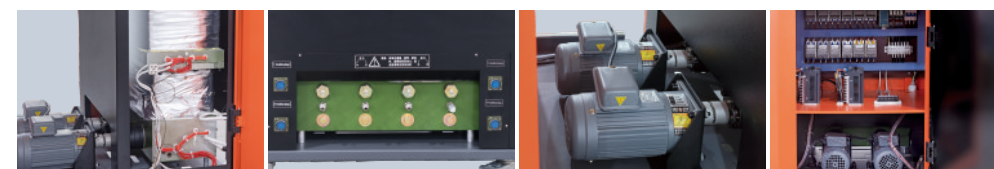

LCD & 平面图 LCD & Plan diagram:

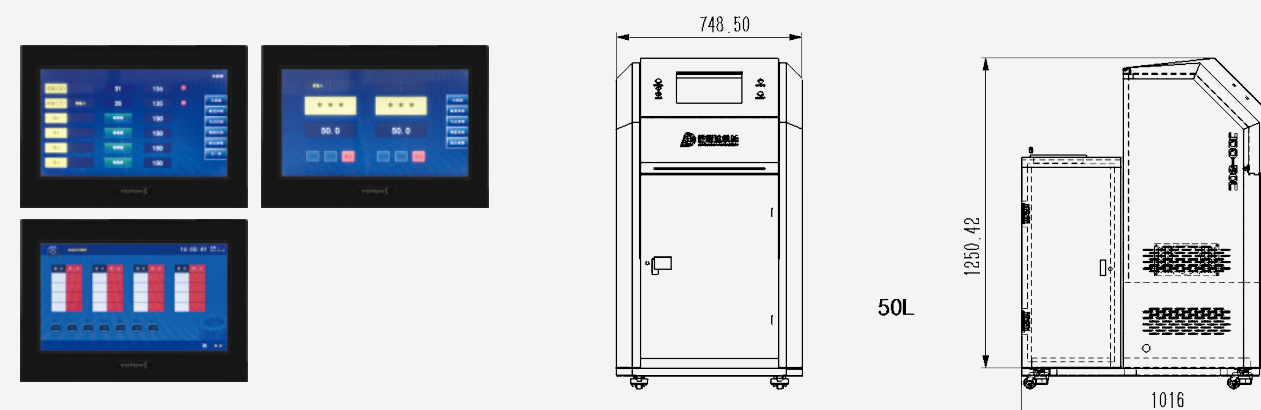

XD-Z80L 热熔胶机

XD-Z80L Hot Melt Glue Machine


1. 信捷或西门子PLC操作系统，中英文操作，自动开关机功能，胶量自动跟踪；
2. 容量80L，熔胶速度每小时75kg，工作电源AC380V，功率12.5kw，上下2层独立加热；
3. 计量泵6套1*8.0，传感器类型k或pt100（其他型号计量泵和传感器均可）；
4. 供胶方式：高精度计量泵供胶，伺服和变频驱动可选，出胶口6路，回流6路；
5. 可连接 6管 6枪，（胶枪可选：反抽刮枪、点胶排枪、螺旋喷枪、纤维喷枪）；
6. 适用空气过滤器、无纺布、OPP膜、汽车内外饰、卫生用品、医疗行业等产品喷涂胶复合。

1. Xinjie or Siemens PLC operating system, operated in both Chinese and English, with automatic on/off function and automatic tracking of adhesive quantity;
2. Capacity of 80L, melt adhesive speed of 75kg per hour, working power supply of AC380V, power of 12.5kw, independent heating of upper and lower layers;
3. 6 sets of metering pumps 1 * 8.0, sensor type k or pt100 (other models of metering pumps and sensors are acceptable);
4. Glue supply method: high-precision metering pump for glue supply, servo and variable frequency drive optional, 6 glue outlets and 6 reflux channels;
5. Can connect 6 tubes and 6 guns (optional glue guns: reverse suction scraper gun, dispensing line gun, spiral spray gun, fiber spray gun);
6. Suitable for spraying adhesive composite on products such as air filters, non-woven fabrics, OPP films, automotive interior and exterior decorations, hygiene products, and medical industries.




简约、集成、智能
Simplicity, Integration, Intelligence


胶枪选择 Selection of glue gun

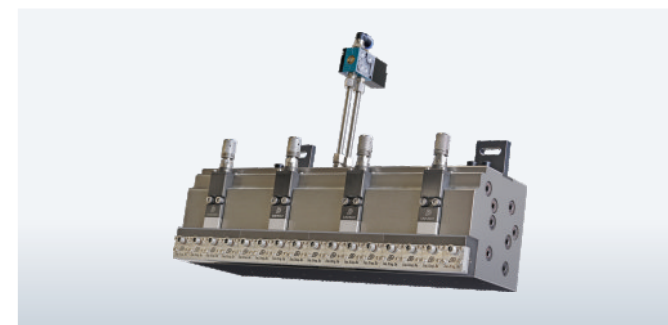

XD-25XW 400mm

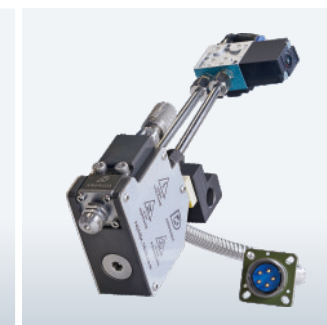

零滴漏胶枪 XD-LD 40mm

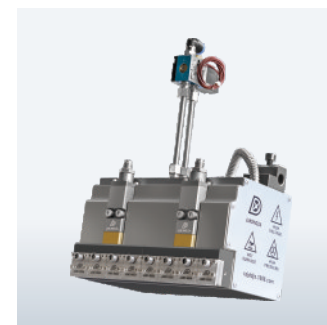

XD-25XW 200mm




XD-2FC 80mm



条状胶枪 XD-XQ 40mm



LCD & 平面图 LCD & Plan diagram:

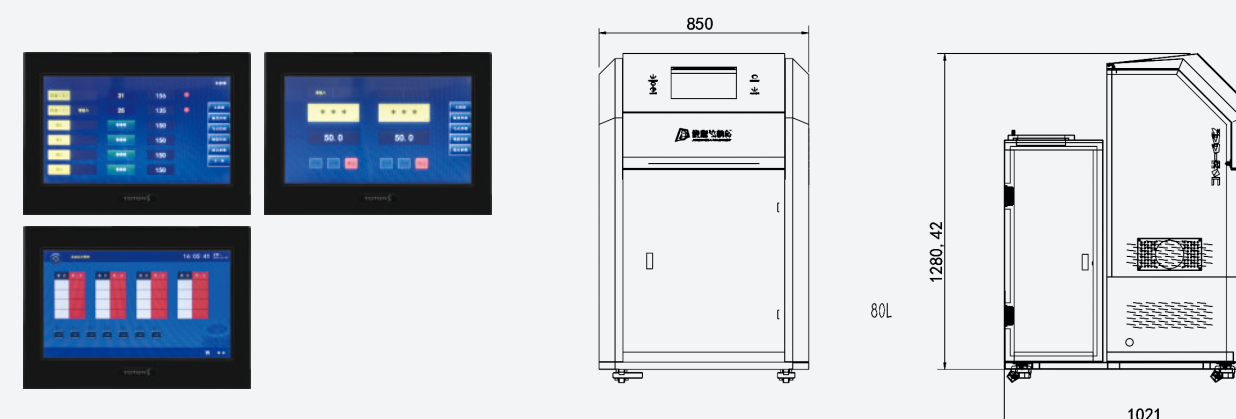

XD-Z100L 热熔胶机

XD-Z100L Hot Melt Glue Machine


1. 信捷或西门子PLC操作系统，中英文操作，自动开关机功能，胶量自动跟踪；
2. 容量100L，熔胶速度每小时90kg，工作电源AC380V，功率14.5kW，上下2层独立加热；
3. 计量泵2套20cc，30cc，传感器类型k或pt100（其他型号计量泵和传感器均可）；
4. 供胶方式：高精度计量泵供胶，伺服和变频驱动可选，出胶口6路，回流6路；
5. 可连接4管4枪（胶枪可选：大型反抽刮枪、点胶排枪、螺旋喷枪、纤维喷枪）；
6. 适用空气过滤器、无纺布、opp膜、汽车内外饰、卫生用品、标签涂布、医疗行业等产品喷涂胶复合。

1. Xinjie or Siemens PLC operating system, operated in both Chinese and English, with automatic on/off function and automatic tracking of adhesive quantity;
2. Capacity of 100L, melt adhesive speed of 90kg per hour, working power supply of AC380V, power of 14.5kW, independent heating of upper and lower layers;
3. Two sets of measuring pumps, 20cc and 30cc, with sensor types of k or pt100 (other models of measuring pumps and sensors are acceptable);
4. Glue supply method: high-precision metering pump for glue supply, servo and variable frequency drive optional, 6 glue outlets and 6 reflux channels;
5. Can connect 4 tubes and 4 guns (optional glue guns: large reverse suction scraper gun, dispensing line gun, spiral spray gun, fiber spray gun);
6. Suitable for spraying adhesive composite on products such as air filters, non-woven fabrics, OPP films, automotive interior and exterior decoration, hygiene products, label coating, medical industry, etc.



简约、集成、智能
Simplicity, Integration, Intelligence


胶枪选择 Selection of glue gun

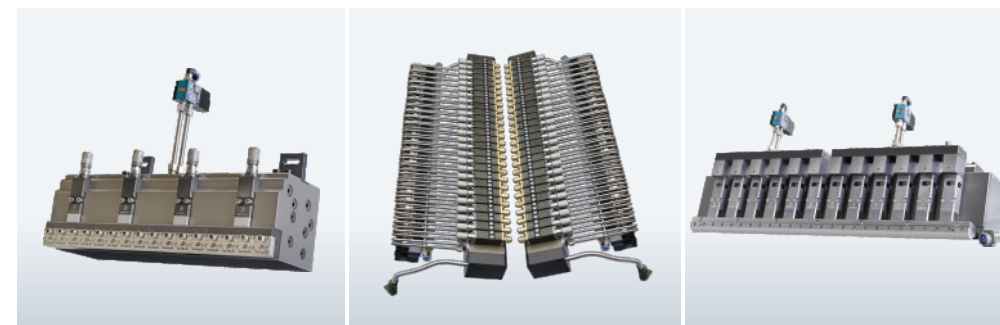

XD-25XW 400mm

XD-26LD 25.4-700mm


XD-ZHFCTB 1000mm

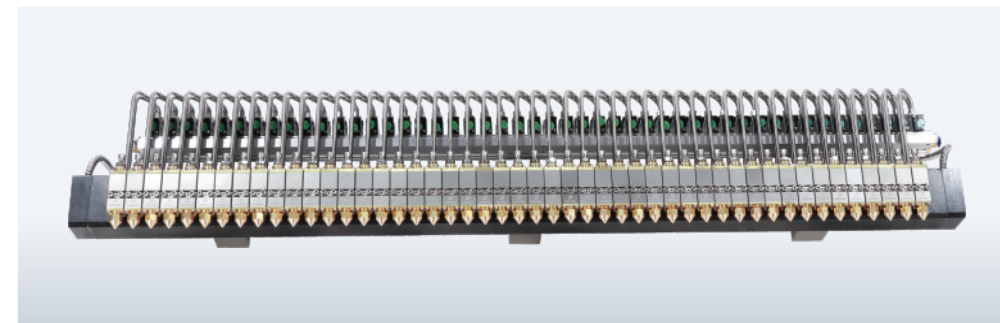

XD-48ZH25.4 (适配1300mm上胶线)



LCD & 平面图 LCD & Plan diagram:

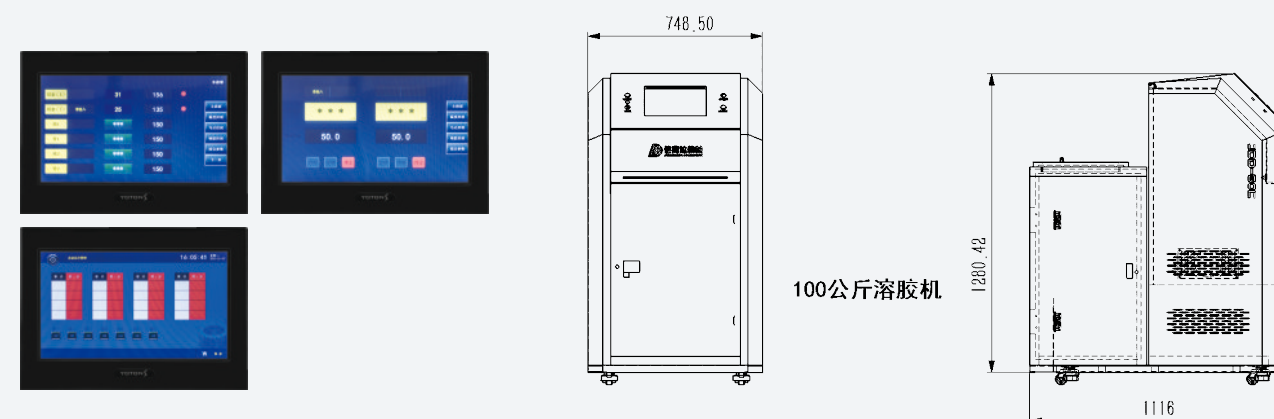

XD-Z150L 热熔胶机

XD-Z150L Hot Melt Glue Machine

1. 信捷或西门子PLC操作系统，中英文操作，自动开关机功能，胶量自动跟踪；
2. 容量150L，熔胶速度每小时130kg，工作电源AC380V，功率24.5kW，下中上3层独立加热；
3. 计量泵1-3套 50cc, 80cc 可选传感器类型k或pt100 (其他型号计量泵和传感器均可)；
4. 供胶方式：高精度计量泵供胶，伺服和变频驱动可选，出胶口1-2路，回流1-2路；
5. 可连接1管1枪 (胶枪可选：大型反抽刮枪，点胶排枪，纤维喷枪)；
6. 适用热熔胶涂布、服装面料滚涂复合、无纺布、OPP膜、汽车内外饰、卫生用品、标签、医疗行业等产品喷涂胶复合。


1. Xinjie or Siemens PLC operating system, operated in both Chinese and English, with automatic on/off function and automatic tracking of adhesive quantity;
2. Capacity of 150L, melt adhesive speed of 130kg per hour, working power supply of AC380V, power of 24.5kW, independent heating of the lower, middle, and upper layers;
3. 1-3 sets of 50cc and 80cc metering pumps with optional sensor types k or pt100 (other models of metering pumps and sensors are also available);
4. Glue supply method: high-precision metering pump for glue supply, servo and variable frequency drive optional, 1-2 glue outlets and 1-2 reflux channels;
5. Can connect 1 tube and 1 gun (glue gun optional: large reverse suction scraper gun, glue dispensing gun, fiber spray gun);
6. Suitable for hot melt adhesive coating, clothing fabric roll coating composite, non-woven fabric, OPP film, automotive interior and exterior decoration, hygiene products, labels, medical industry and other product spray adhesive composite.




High-capacity
大容量

简约、集成、智能
Simplicity, Integration, Intelligence


胶枪选择 Selection of glue gun

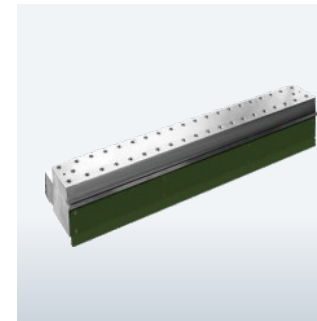


XD-TB800-1600mm

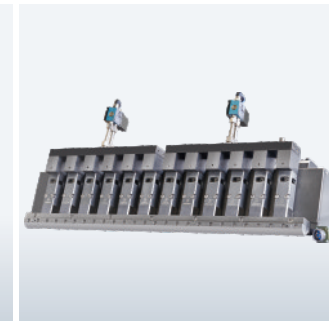



XD-ZHFCTB 1000mm

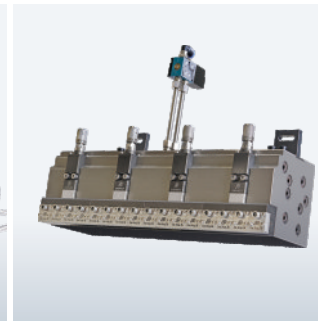


XD-25XW 400mm

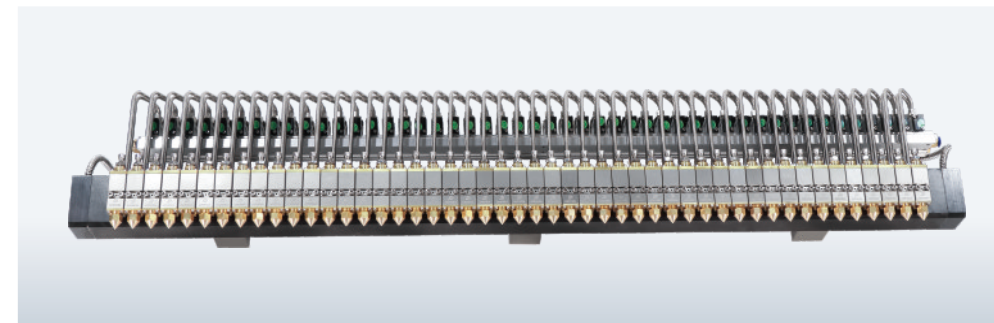

XD-48ZH25.4 (适配1300mm上胶线)



上、中、上三层加热

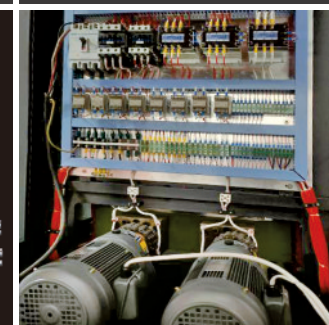

胶桶 600*500*1500mm



XD-FPZ50L 发泡热熔胶机

XD-FPZ50L Hot Melt Glue Machine

- a. 混合精密计量泵:**
将胶和惰性气体同时混合, 过滤后封闭式发泡;
- b. 惰性气体生产系统:**
利用制氮系统或瓶装高纯度氮气, 用于热熔胶的发泡或为反应型材料提供氮气保护隔离层;
- c. 发泡系统结构要求:**
1) 大量的喷涂发泡热熔胶基材, 用于实现各种产品粘合, 密封, 填充应用;
2) 惰性气体形成封闭式发泡来降低热熔胶和胶粘剂的消耗, 提高粘接效果, 发泡效率50%左右 (实际发泡效率和热熔胶有关);
3) XD-XF25*22mm零滴漏模块具有可靠, 精准的点涂胶;
- d. 高速超级发泡系统:**
将惰性气体和热熔胶同时混合, 通过内外循环系统获得传统喷涂胶应用所没有的效果和优势 (做到省胶, 密封隔离保护);
该设备组成: 胶缸、加热系统、性气体系统, 混合计量泵、胶管、喷胶头组成;
该设备通过加温把固体热熔胶融化成液体, 将热熔胶和惰性气体通过计量泵混合过输送到胶管、喷胶头喷涂到工件上密封发泡。
- e. 应用行业:**
适合应用于蜂窝过滤器、空气过滤器、家电冰箱、空调、电子、汽车等行业发泡密封等。

- a. Hybrid precision metering pump:**
Mix the glue and inert gas simultaneously, filter and seal for foaming;
- b. Inert gas production system:**
Using nitrogen production systems or bottled high-purity nitrogen gas for foaming hot melt adhesives or providing nitrogen protection and isolation layers for reactive materials;
- c. Structural requirements for foaming system:**
1) A large amount of spray foam hot melt adhesive substrate is used to achieve various product bonding, sealing, filling and stamping applications;
2) Emotional gas forms a closed foam to reduce the consumption of hot melt adhesive and adhesive, improve bonding effect, with a foam efficiency of about 50% (actual foam efficiency is related to hot melt adhesive);
3) The XD-XF25*22mm zero drip module has reliable and precise point coating adhesive;
- d. High speed super foaming system:**
Mixing inert gas and hot melt adhesive simultaneously, obtaining effects and advantages that traditional spray adhesive applications do not have through internal and external circulation systems (achieving glue saving, sealing and isolation protection);
The equipment consists of a rubber cylinder, heating system, gas system, mixing metering pump, rubber hose, and spray nozzle;
This device melts solid hot melt adhesive into liquid by heating, mixes hot melt adhesive with inert gas through a metering pump, and delivers it to a rubber hose and spray nozzle to seal and foam the workpiece.
- e. Application industry:**
Suitable for foam sealing in industries such as honeycomb filters, air filters, household appliances, refrigerators, air conditioners, electronics, and automobiles.



国内首创
发泡热熔胶机

简约、集成、智能
Simplicity, Integration, Intelligence

工作原理 Working principle:

将惰性气体与热熔胶和密封胶混合, 经胶管输出至胶枪形成封闭式发泡结构。使用该发泡喷涂胶设备, 热熔胶的体积和重量可减少50%, 达到节约用胶, 封闭密封的作用。

Mix inert gas with hot melt adhesive and sealant, and output it through a rubber hose to the glue gun to form a closed foam structure. By using this foaming spray coating equipment, the volume and weight of hot melt adhesive can be reduced by 50%, achieving the effect of saving glue and sealing.

胶枪选择 Selection of glue gun



发泡胶枪 XD-FP8JQ 40mm




XD-FP26JQ2.4 零滴漏发泡组合胶枪



XD-SDXJ 120mm



XD-SDLX 120mm

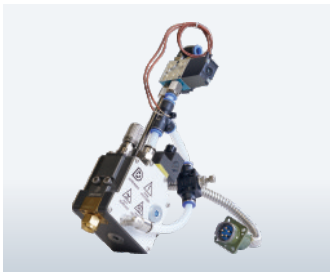


XD-LX 40mm

主要技术参数 The main technical parameters

应用类型	Application type	聚烯烃发泡热熔胶
熔缸容积	Melting tank volume	50L尺寸: 500*260*850
出胶口, 回胶口	Adhesive outlet, adhesive return outlet	各2路,
计量泵	Metering pump	5.4CC1套高速混合泵
最大供胶量	Maximum glue supply	120KG/H
熔胶速度	Melt speed	48kg/h
控制方式	control mode	智能PLC温控系统 (信捷系统和伺服驱动)
电源功率	Power supply power	AC-380V
发泡气体	Foaming gas	7.5kw (含管枪)
可发泡气体流量	Foamable gas flow rate	氮气
发泡效率	Foaming efficiency	0.2-1.6bar
发泡热熔胶枪	Foam hot melt adhesive gun	最大50%
胶管	Rubber hose	单头发泡胶枪2套或排枪 4米, 4.5米各2条

LCD & 平面图 LCD & Plan diagram:

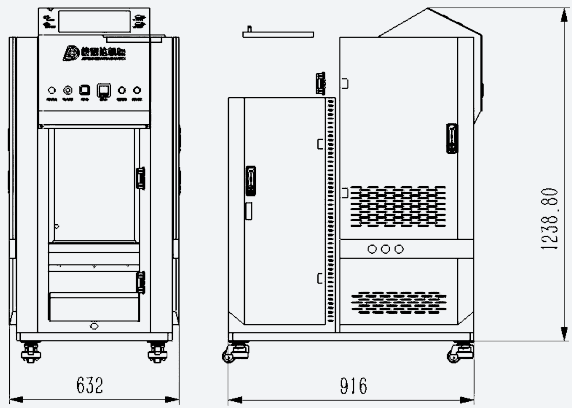

XD-HS 活塞泵热熔胶机


XD-HS Hot Melt Glue Machine



XD-HS3L

1. 功率2.5kw, 电源AC-220V, 工作气压0.1-0.6mpa
2. PLC触屏控制, 中英文操作系统
3. 供胶方式: 活塞泵供胶, 出胶口1-2路
4. 可以选配1-2管和胶枪 (适用纸盒包装, 选配零滴漏胶枪或旋转胶枪或螺旋喷枪)

1. Power 2.5kw, power supply AC-220V, working pressure 0.1-0.6mpa
2. PLC touch screen control, operating system in both Chinese and English
3. Glue supply method: piston pump for glue supply, 1-2 glue outlets
4. Optional 1-2 tubes and glue gun (suitable for paper box packaging, optional zero drip glue gun or rotary glue gun or spiral spray gun)

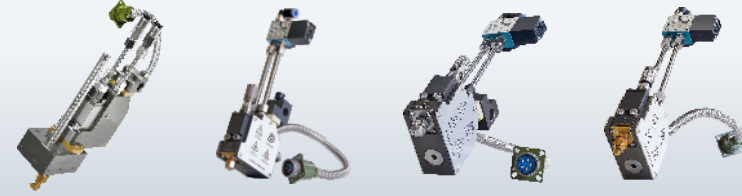

XD-HS5L

1. 功率3.5kw, 电源AC-220V, 工作气压0.1-0.6mpa
2. PLC触屏控制, 中英文操作系统
3. 供胶方式: 活塞泵供胶, 出胶口1-3路
4. 可以选配1-3管和胶枪 (适用纸盒包装, 选配零滴漏胶枪或旋转胶枪或螺旋喷枪)


1. Power 3.5kw, power supply AC-220V, working pressure 0.1-0.6mpa.
2. PLC touch screen control, operating system in both Chinese and English.
3. Glue supply method: piston pump for glue supply, 1-3 glue outlets.
4. Optional 1-3 tubes and glue gun (suitable for paper box packaging, optional zero drip glue gun or rotary glue gun or spiral spray gun).



XD-HS10L

1. 功率4.5kw, 电源AC-220V, 工作气压0.1-0.6mpa
2. PLC触屏控制, 中英文操作系统
3. 供胶方式: 活塞泵供胶, 出胶口1-4路
4. 可以选配1-4管和胶枪 (适用纸盒, 鞋盒, 高端化妆品盒包装, 选配零滴漏胶枪或旋转胶枪或螺旋喷枪或刮涂胶枪)

1. Power 4.5kw, power supply AC-220V, working pressure 0.1-0.6mpa.
2. PLC touch screen control, operating system in both Chinese and English.
3. Glue supply method: piston pump for glue supply, 1-4 glue outlets.
4. Optional 1-4 tubes and glue gun (suitable for paper boxes, shoe boxes, high-end cosmetics box packaging, optional zero drip glue gun or rotary glue gun or spiral spray gun or scraping glue gun).

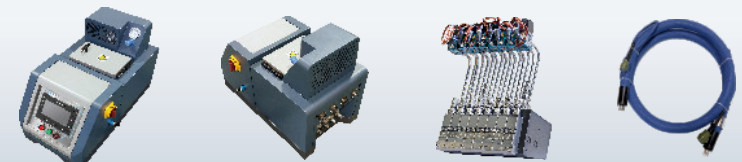

PUR 热熔胶机

PUR Hot Melt Glue Machine

主要特点 Characteristic:

5-55加仑PUR热熔胶机, 压盘和桶式可选, 采用压盘式加热, 2路出胶口。熔多少用多少, 无碳化现象, 配置不同胶枪可完成, 涂胶、点胶、喷胶; 利用PUR热熔胶的高粘度可干性, 使产品的粘着更牢固可靠。

5-55 gallon PUR hot melt adhesive machine, with optional pressure plate and barrel type, using pressure plate heating and 2 adhesive outlets. Melt as much as you need, no carbonization phenomenon, different glue guns can be configured to complete gluing, dispensing, and spraying; The high viscosity and dryness of PUR hot melt adhesive make the adhesion of the product more firm and reliable.



XD-5PUR



XD-55PUR



XD-T5PUR



XD-2T5PUR

俊鼎达胶枪

多样款式, 按需组合

GLUE GUN

小纤维喷枪 Small fiber spray gun



XD-25XW 40mm

XD-25XW 100mm

XD-25XW 200mm

XD-25XW 400mm



Provide various specifications and models of small fiber nozzles to meet various special spraying applications:

提供各种规格型号的小纤维喷嘴，满足各种特殊喷涂应用：

1. 配置120目外置精密过滤系统，减少堵塞现象；
2. 采用气开气关设计，配置MAC电磁阀满足高速运行；
3. 喷嘴采用合金材料加工，延长使用寿命；
4. 阀体采用全氟胶密封圈，减少漏胶现象；
5. 喷枪采用包围保温结构设计，气路循环加热系统；适用多种热熔胶喷涂作业。

1. Install a 120 mesh external precision filtration system to reduce clogging;
2. Adopting an air on/off design, equipped with MAC solenoid valve to meet high-speed operation;
3. The nozzle is processed with alloy material to extend its service life;
4. The valve body adopts a fully fluorinated rubber sealing ring to reduce glue leakage;
5. The spray gun adopts a surrounding insulation structure design and an air circulation heating system; Suitable for various hot melt adhesive spraying operations.

反抽涂胶枪系列 Reverse suction glue gun series

1. 大流量反抽阀体，采用气开气关设计，配置MAC电磁阀满足高速间隔涂胶；
2. 刮刀采用合金采用加工，刮唇硬度60°，耐磨提高使用寿命；
3. 外置120目精密过滤系统减少涂胶堵塞现象。

1. The high flow reverse suction valve body adopts an air opening and air closing design, and is equipped with a MAC solenoid valve to meet the high-speed interval coating requirements;
2. The scraper is made of alloy and processed with a lip hardness of 60°, which is wear-resistant and improves its service life;
3. The external 120 mesh precision filtration system reduces the phenomenon of glue blockage.



XD-2FC 80mm

XD-FC 60mm

XD-FCKT 70mm

XD-ZHFC 90mm




XD-3FC 300mm

XD-FCTB 300mm

XD-ZHFCTB 1000mm

多种刮刀供客户选择


Multiple scraper options for customers to choose from

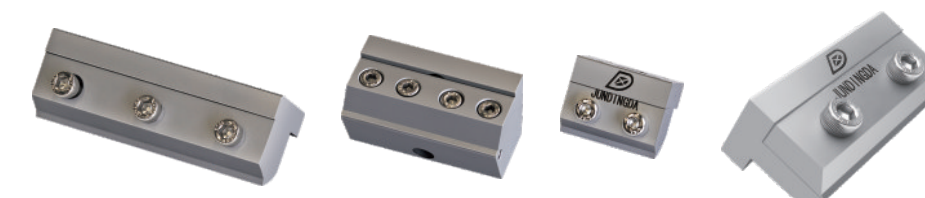

手动枪系列 Manual gun series

1. 手动扣动扳机可以实现出胶；
2. 提供条状线胶和螺旋喷胶2种；
3. 对纸箱，汽车内外饰包装或家居用品实现喷胶作业。

1. Manually pulling the trigger can achieve glue dispensing;
2. Provide two types of adhesive: strip adhesive and spiral spray adhesive;
3. For cardboard boxes, car interior and exterior packaging, or implement adhesive spraying for household items.

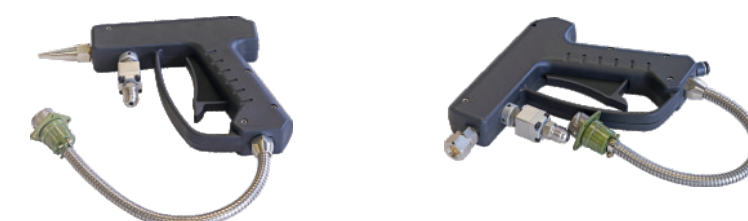


XD-SDXJ 120mm

XD-SDLX 120mm



XD-FP26JQ2.4 零滴漏发泡组合胶枪

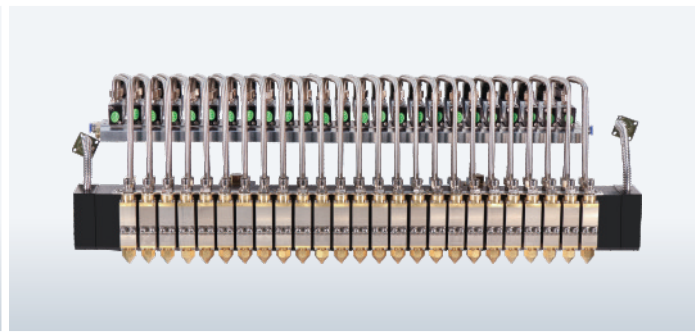

XD-26ZH25.4 (适配700mm上胶线)




XD-48ZH25.4 (适配1300mm上胶线)


主要特点 Characteristic:

1. 组合式发泡热熔胶枪，采用领滴漏结构设计满足高速断胶；
2. 胶枪采用气开气关独立电磁阀控制，通过电控来实现不同尺寸上胶；
3. 配置精密的外置过滤系统，减少堵塞现象清洗方便；
4. 喷嘴孔径0.2-1.0mm可以选择，满足不同胶线要求。


1. Combination foam hot melt adhesive gun, designed with a collar drip structure to meet high-speed adhesive breakage requirements;
2. The glue gun is controlled by an independent solenoid valve with air opening and air closing, and different sizes of glue are applied through electronic control;
3. Equipped with a precise external filtration system to reduce clogging and facilitate cleaning;
4. The nozzle aperture can be selected from 0.2-1.0mm to meet different glue line requirements.

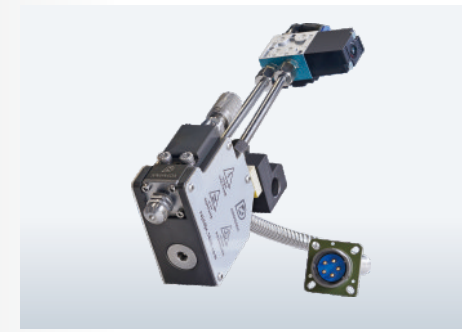

零滴漏胶枪 XD-LD 40mm

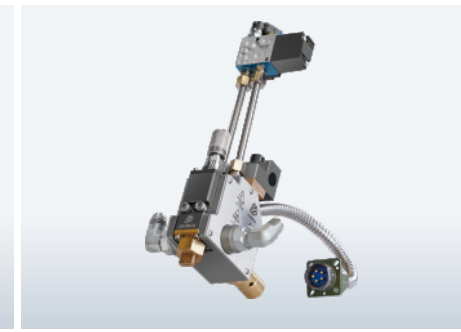

发泡胶枪 XD-FP8JQ 40mm

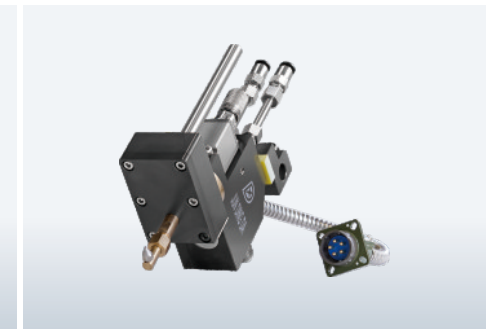

旋转胶枪 XD-XZ 40mm



侧面点胶枪 XD-ZP 40mm



条状胶枪 XD-XQ 40mm



多孔喷枪 XD-XP2-4

主要特点 Characteristic:

1. 胶枪气开气关设计，配置MAC电磁阀，满足高速间断喷胶；
2. 半包围保温机构设计，保温更好，适用更多高温胶；
3. 配置120目过滤系统，减少喷嘴堵塞现象；
4. 0.2-0.4mm多种喷嘴选择满足不同包装喷涂胶作业。

1. Rubber gun air on/off design, equipped with MAC solenoid valve to meet high-speed intermittent spraying of glue;
2. Semi enclosed insulation mechanism design, better insulation, suitable for more high-temperature adhesives;
3. Install a 120 mesh filtration system to reduce nozzle clogging;
4. Multiple nozzle options ranging from 0.2-0.4mm are available to meet different packaging spray glue operations.

